



Apparecchio monodirezionale di potenza per esterni da parete. Corpo quadrato in alluminio estruso con frontale in vetro. Fissaggio a parete con apposita staffa. L'innovativo sistema di montaggio, tramite l'utilizzo di colle ad altissima tenuta, permette l'eliminazione delle viti, rendendo il prodotto pulito ed elegante. Disponibile con LED COB di potenza 10W in varie tonalità di bianco e in varie finiture da abbinare al contesto. Ideale per illuminazione di pareti.

Disegno tecnico





Diagramma a coni

Diagramma a coni rilevato con LED COB, lente 45°, bianco naturale.

Cone diagram measured with natural white, COB LED, lens 45°.

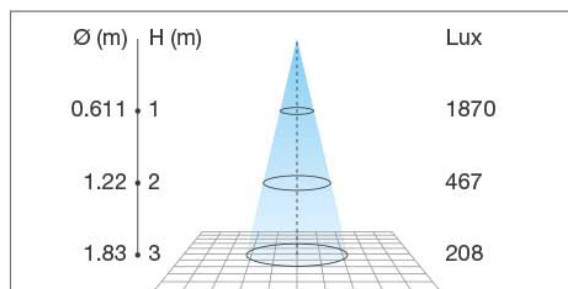

Modelli

Codice	Finitura	Alimentatore Input	Numero Led led/m	Colore Luce	Gradi Lente	Lumen Max - Lumen/m	Potenza Max
PH03S10W1A6A	Bianco	230Vac	1		15°		10W
PH03S10W1A6B	Grigio RAL9006	230Vac	1		15°		10W
PH03S10W1A6M	Cor-Ten	230Vac	1		15°		10W
PH03S10W1A6N	Grigio Scuro RAL7043	230Vac	1		15°		10W
PH03S10W1B6A	Bianco	230Vac	1		45°		10W

PH03S10W1B6B	Grigio RAL9006	230Vac	1		45°	10W
PH03S10W1B6M	Cor-Ten	230Vac	1		45°	10W
PH03S10W1B6N	Grigio Scuro RAL7043	230Vac	1		45°	10W
PH03S10W1D6A	Bianco	230Vac	1		120°	10W
PH03S10W1D6B	Grigio RAL9006	230Vac	1		120°	10W
PH03S10W1D6M	Cor-Ten	230Vac	1		120°	10W
PH03S10W1D6N	Grigio Scuro RAL7043	230Vac	1		120°	10W
PH03S10W1T6A	Bianco	230Vac	1		25°	10W
PH03S10W1T6B	Grigio RAL9006	230Vac	1		25°	10W
PH03S10W1T6M	Cor-Ten	230Vac	1		25°	10W
PH03S10W1T6N	Grigio Scuro RAL7043	230Vac	1		25°	10W
PH03S10W2A6A	Bianco	230Vac	1		15°	10W
PH03S10W2A6B	Grigio RAL9006	230Vac	1		15°	10W
PH03S10W2A6M	Cor-Ten	230Vac	1		15°	10W
PH03S10W2A6N	Grigio Scuro RAL7043	230Vac	1		15°	10W
PH03S10W2B6A	Bianco	230Vac	1		45°	10W
PH03S10W2B6B	Grigio RAL9006	230Vac	1		45°	10W
PH03S10W2B6M	Cor-Ten	230Vac	1		45°	10W
PH03S10W2B6N	Grigio Scuro RAL7043	230Vac	1		45°	10W
PH03S10W2D6A	Bianco	230Vac	1		120°	10W
PH03S10W2D6B	Grigio RAL9006	230Vac	1		120°	10W
PH03S10W2D6M	Cor-Ten	230Vac	1		120°	10W
PH03S10W2D6N	Grigio Scuro RAL7043	230Vac	1		120°	10W
PH03S10W2T6A	Bianco	230Vac	1		25°	10W
PH03S10W2T6B	Grigio RAL9006	230Vac	1		25°	10W
PH03S10W2T6M	Cor-Ten	230Vac	1		25°	10W
PH03S10W2T6N	Grigio Scuro RAL7043	230Vac	1		25°	10W
PH03S10W9A6A	Bianco	230Vac	1		15°	10W
PH03S10W9A6B	Grigio RAL9006	230Vac	1		15°	10W

PH03S10W9A6M	Cor-Ten	230Vac	1		15°	10W
PH03S10W9A6N	Grigio Scuro RAL7043	230Vac	1		15°	10W
PH03S10W9B6A	Bianco	230Vac	1		45°	10W
PH03S10W9B6B	Grigio RAL9006	230Vac	1		45°	10W
PH03S10W9B6M	Cor-Ten	230Vac	1		45°	10W
PH03S10W9B6N	Grigio Scuro RAL7043	230Vac	1		45°	10W
PH03S10W9D6A	Bianco	230Vac	1		120°	10W
PH03S10W9D6B	Grigio RAL9006	230Vac	1		120°	10W
PH03S10W9D6M	Cor-Ten	230Vac	1		120°	10W
PH03S10W9D6N	Grigio Scuro RAL7043	230Vac	1		120°	10W
PH03S10W9T6A	Bianco	230Vac	1		25°	10W
PH03S10W9T6B	Grigio RAL9006	230Vac	1		25°	10W
PH03S10W9T6M	Cor-Ten	230Vac	1		25°	10W
PH03S10W9T6N	Grigio Scuro RAL7043	230Vac	1		25°	10W
PH03SCUSTOM		230Vac	1			10W