


NUOVI PRODOTTI

VI01R



Uplight da incasso calpestabile, estremamente piccolo e resistente.

Grazie alle sue ridotte dimensioni (diametro 3,4cm e altezza 0,9cm) può essere applicato su parquet e piastrelle. Corpo in alluminio anodizzato, resinato, calpestabile e lavabile. Ideale per creare percorsi scenografici o giochi di luce all'interno della tua abitazione.


Walkable recessed uplight, tough and tiny.

With its size (3,4cm diameter and 0,9cm high), VI01N can be applied on parquet and floor tiles. Resin walkable and washable anodized aluminum body. VI01N is designed to create scenographic paths or light game inside your house.

Led color
1 = 3200°K (95 lumen)
7 = RGB
9 = 4100°K (100 lumen)
 Power supply
5 = 24Vdc

Code	VI01R
Power	1W (5 LED SMD)
Led color	1-9
Spot	D
Power supply	5
Finishing	D

Code	VI01R
Power	1W (5 LED SMD RGB)
Led color	7
Spot	D
Power supply	5
Finishing	D

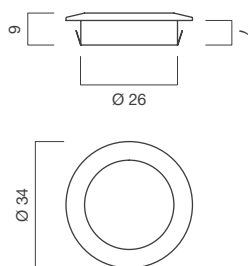

Spot



D = 120°

Finiture / Finishing




Nichel spazzolato
Brushed nickel

D

Esempio codice / Code example


VI01R1W1D5D

Diagramma a cono rilevato con LED SMD,
bianco naturale, emissione 120°.
Cone diagram measured with natural white,
SMD LED, 120° emission.

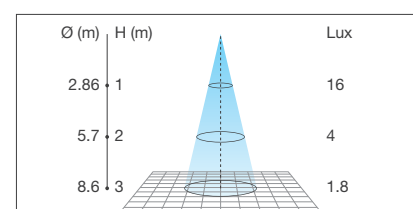

NUOVI PRODOTTI

VI02R



Un uplight da incasso calpestabile, resistente e dalle dimensioni contenute (diametro 6,5cm e altezza 1,5cm).

Corpo in alluminio anodizzato, resinato, calpestabile e lavabile. Ideale per creare percorsi scenografici o giochi di luce all'interno della tua abitazione.

Led color
1 = 3200°K (285 lumen)
7 = RGB
9 = 4100°K (300 lumen)


Power supply
5 = 24Vdc

Code	VI02R
Power	3W (15 LED SMD)
Led color	1-9
Spot	D
Power supply	5
Finishing	D

A resistant walkable recessed uplight with tiny size. (6,5 cm diameter and 1.5 cm high).

Resin walkable and washable anodized aluminum body. VI01N is designed to create scenographic paths or light game inside your house.

Code	VI02R
Power	3W (15 LED SMD RGB)
Led color	7
Spot	D
Power supply	5
Finishing	D

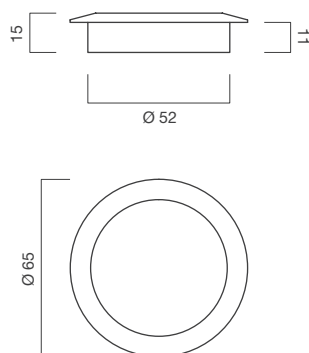

Spot



D = 120°

Finiture / Finishing



Nichel spazzolato
 Brushed nickel


D

Esempio codice / Code example

VI02R3W9D5D

Diagramma a cono rilevato con LED SMD, bianco caldo, emissione 120°.

Cone diagram measured with warm white, SMD LED, 120° emission.

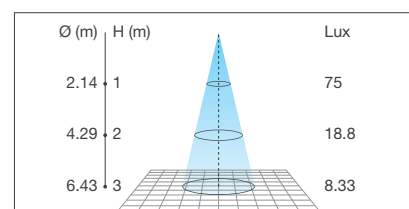

NUOVI PRODOTTI

VI03R



Uplight da incasso per esterno, calpestabile.

Grazie alla compattezza e alla resistenza agli agenti atmosferici, risulta adatto a un numero considerevole di applicazioni, per illuminare pareti e percorsi. La qualità degli elementi (corpo fatto al tornio, vetro filo pavimento temperato) lo rendono affidabile e duraturo. Disponibili in differenti tonalità di luce. Controcassa a parte.

Outdoor walkable recessed uplight.

It is compact and resistant to atmospheric agents, resulting suitable to many applications, to light up walls and paths. The quality of the materials (lathe-made body and tempered floor flush glass) make VI03N reliable and durable. VI03N is available in different light tone. Outercasing not included.

Led color

- 1 = 3200°K (247 lumen)
- 2 = 6000°K (283 lumen)
- 3 = Blu / Blue
- 9 = 4100°K (266 lumen)

Power supply

- 5 = 24Vdc

Code

VI03R

Power

3W (1 LED HP SMD)

Led color

1-2-3-9

Spot

D




Power supply

5

Finishing



T

Per la versione a 24Vdc, il prodotto viene corredato di un driver sul cavo di alimentazione.
For the 24Vdc version, the product is equipped with a driver on the input wire.

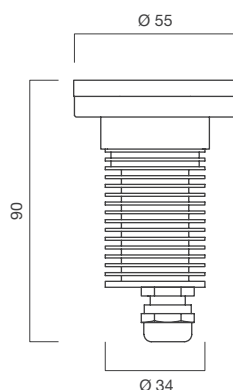

D = 120°

Finiture / Finishing



Code TA352

Controcassa in plastica
filo pavimento
Plastic recessed box
flooring installation

Esempio codici ordine / Example order codes

Codice motore / Engine code

Codice controcassa / Box code

VI03R3W2D5T

+

TA352

Codice accessori elettrici / Electrical accessories code


Power supply IP67

APP009.24	1 - 2	ALP120.24	1 - 34
ALP015.24	1 - 4	ALP150.24	1 - 40
ALP030.24	1 - 8	ALP200.24	1 - 55
ALP060.24	1 - 18		

Dimmer Controller IP20


AL240P	1 - 68
AL288D/P	1 - 80
CTR112DIM	1 - 80

Diagramma a cono rilevato con LED HP SMD, bianco naturale, emissione 120°.
Cone diagram measured with natural white, HP SMD LED, 120° emission.

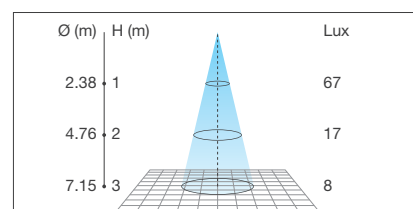

NUOVI PRODOTTI

VI04R



Uplight da incasso per esterno, calpestabile.

Grazie alla compattezza e alla qualità degli elementi (corpo ricavato al tornio, vetro filo pavimento temperato e led ad alta intensità da 9W) lo rendono performante, efficiente e duraturo. Disponibili in differenti tonalità di luce. Cotrocassa a parte.

Led color

- 1** = 3200°K (964 lumen)
- 9** = 4100°K (1000 lumen)




Power supply

- 5** = 24Vdc

Code	VI04R
Power	9W (1 LED HI SMD)
Led color	1-9
Spot	D
Power supply	5
Finishing	T


Outdoor walkable recessed uplight.

It is compact and the quality of the materials (lathe-made body, tempered floor flush glass and 9W high intensity LED) make it efficient and durable. VI04N is available with different light tones. Outercasing not included.

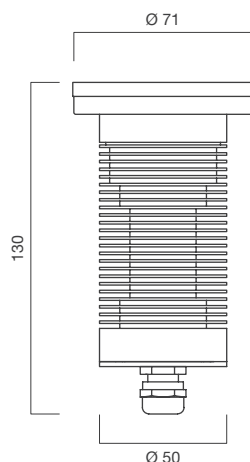


D = 120°

Finiture / Finishing



Vetro
Glass



Code TA312

Cotrocassa in plastica
filo pavimento
Plastic recessed box
flooring installation

Esempio codici ordine / Example order codes

Codice motore / Engine code

Codice cotrocassa / Box code

VI04R9W1D5T

+ TA312

Codice accessori elettrici / Electrical accessories code

Power supply IP67

ALP015.24	1	ALP120.24	1 - 12
ALP030.24	1 - 3	ALP150.24	1 - 15
ALP060.24	1 - 6	ALP200.24	1 - 21

Dimmer Controller IP20

AL240P	1 - 22
AL288D/P	1 - 27
CTR112DIM	1 - 27

Diagramma a cono rilevato con LED HI SMD, bianco naturale, emissione 120°.

Cone diagram measured with natural white, HI SMD LED, 120° emission.

